


HOTFLOW

DIESEL SPACE HEATERS

- High air volume, higher efficiency
- External thermostat can be connected, wider application scenarios
- Built-in overheat protector in the motor, no risk of burning
- Stainless steel durable combustion chamber,
- Oil tank level indicator, easy maintenance
- Built-in wheels and handles, easy to move
- Electronic and photoelectric flame sensor controller for safer operation
- Dual filtration: refueling filtration and oil suction filtration
- Good thermal insulation design, the shell will not overheat after long-term use
- Digital display control ensures easy operation



Model: HF55KW

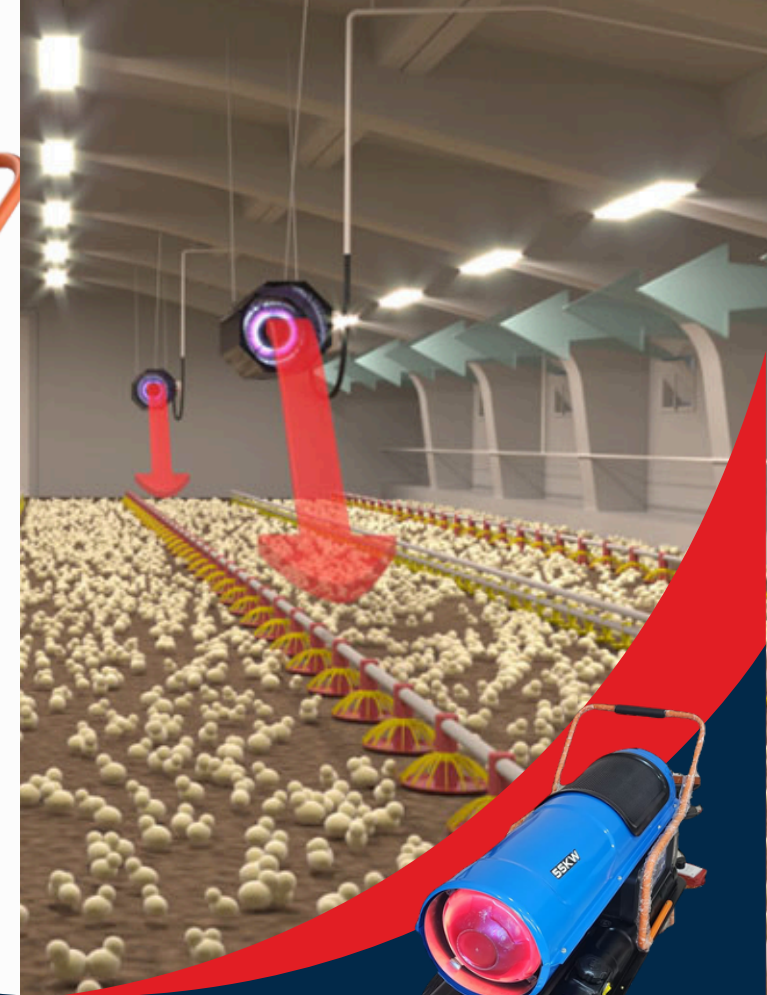

www.cps.net.in



Factory

Chishtiya Poultry Services Pvt. Ltd.

332, GIDC, Por, Dist. Vadodara -
391243.

(Gujarat) INDIA

www.chishtiya.com

Contact



www.chishtiya.com



info@chishtiya.com



+91 94096 78642



customer
care

HOTFLOW

DIESEL SPACE HEATER

HOTFLOW**Model: HF55KW****Digital Controller****Pressure Gauge****Fuel Gauge****External Thermo. Connector**

Reliable Heat = Healthy Chicks

In poultry farming, especially during the brooding stage, young chicks cannot regulate their body temperature. They depend entirely on external heat. A diesel space heater plays a vital role in providing that consistent, controlled warmth.

HOTFLOW DIESEL SPACE HEATERS

Essential for Poultry Brooding Strong Heat, Smart Saving

- ♦ Fast, Uniform Heating: Keeps chicks warm evenly – no cold corners, no piling.
- ♦ Perfect for Any Weather: Reliable even in extreme cold or rainy season.
- ♦ Fuel Efficient: Saves diesel, reduces daily operating cost.
- ♦ Electricity Required: Operates on power to run fan and automation system.
- ♦ Safe & Mobile: Designed specially for poultry, easy to shift, easy to maintain.
- ♦ One year warranty
- ♦ Spares easily available at a reasonable rate

TECHNICAL SPECIFICATIONS	MODELS	
	HF35KW	HF55KW
	DIESEL/KEROSINE	DIESEL/KEROSINE
Volatage:	220	220
Power (kW):	35	55
Air Exchange Volume:	750m ³ /h	1150m ³ /h
Fuel Consumption (Ltr./Hr.):	2 to 3	3 to 5
Fuel Tank Capacity/Ltr:	38	56
Kcal/Hr.	18000 - 28000	25000 - 45000
Brooding Area Covrage (Sq.Ft.) @ 7' Height:	3000 - 4000*	4200 - 7500*
Capacity of Brooding @ 0.5/sq.ft/Chicks:	6000 - 7500*	8000 - 12000*
Recommended Chick Age Range (Days):	1 to 14	1 to 14
Automatic Temp. Controller:	Yes	Yes
Timer:	Yes	Yes
Auto. Cooling Period After Cut Off/Seconds:	90	90
Heating Type:	Direct Hot Air Blower	Direct Hot Air Blower
Dimensions (mm):	850x380x450	1010x420x515
Net Weight Kgs:	20.85	30.3
Running Cost/Hr @ Rs. 90.00/ltr:	180 - 270	270 - 450
Warranty:	1 Year	1 Year
Spare Parts Availability:	Assured by Chishtiya	Assured by Chishtiya

*Values may vary depending on shed insulation, ventilation, and ambient temperature



www.cps.net.in

**Chishtiya Poultry Services
Pvt. Ltd.**

332, GIDC, Por,
Dist. Vadodara - 391243.
(Gujarat) INDIA



customer
care